

# CAT6A CABLE

## LTC6AUTPCMR85 LAN CABLE CAT6A SOLID UTP CM

### CONDUCTOR

Conductor: 23AWG Bare Solid Copper  
Insulation: HD-PE  
PVC Jacket available  
Jacket color: Gray  
RoHS / Reach compliant

### APPLICATIONS

10G Base T  
1000Base T (IEEE 802.3ab)  
Telephone and other communication circuits such as voice, data,  
and audio for on-premise customer systems.


### INDUSTRY STANDARDS

UL/CSA Listed CM  
Verified to ANSI/TIA-568-C.2 CAT.6A

### ELECTRICAL CHARACTERISTICS

Impedance:  $100 \pm 15 \text{ohms}$  (1-600MHz)  
Pair to Ground: 330Pf/100M MAX.  
Propagation Delay Skew: 45ns/100M  
Dielectric Strength: AC-500V/1 Min

\*Connectors sold separately.

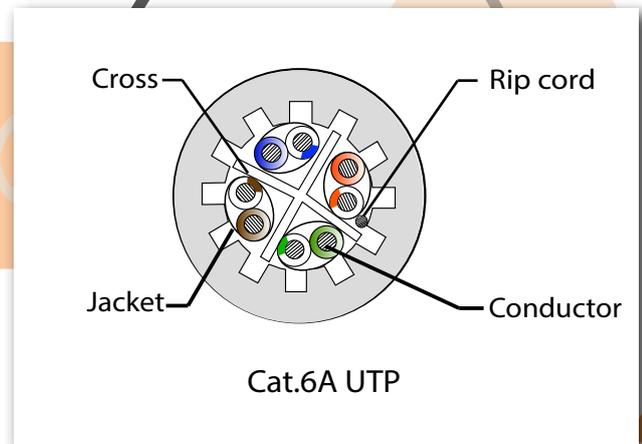

Lamatel

Lamatel Canada  
<https://ca.lamatel.com>

Products specifications are subject to change without prior notice.